

# AOV Pressure Sensor

Teledyne Test Services offers a full line of pressure sensors for use with the QUIKLOOK II AOV Test System. These ruggedized highly accurate sensors are used to capture test pressures such as diaphragm, line and supply pressure as well as I/P output pressure and are available in a variety of ranges. All AOV Pressure sensors include a QUIKLOOK adapter cable.

## Features

- Accuracy: 0.50 % of Full Scale
- Wide range available (see below)
- Robust integrated connector
- Adapter cable (included) connects to QUIKLOOK II cable sets or directly to the QUIKLOOK System.

Teledyne AOV Pressure Sensors are available in the following ranges:


P/N	PSIG Range*
160076-30	0-30
160076-50	0-50
160076-100	0-100
160076-150	0-150
160076-200	0-200
160076C	5 foot Adapter Cable

\*Other ranges available upon request



**3-LCV-006-0047B - Mechanical Properties - As-Left**

03/10/2010 15:51:07 File 10069B10

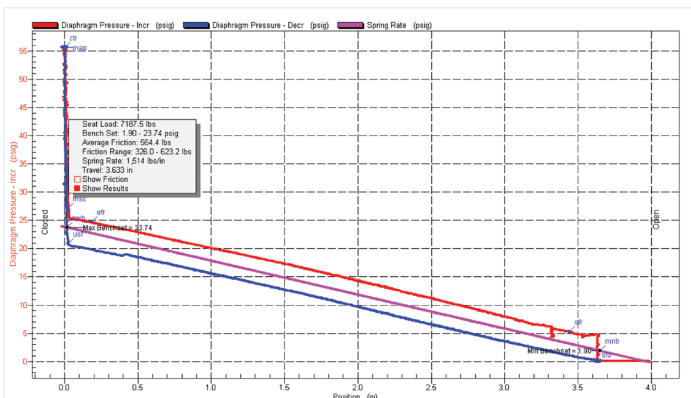

QUIKLOOK II 2010.227  
MRNENPC16.dbr/ra1

Page 1 of 1  
10/6/2010 8:51:28 AM